

(REV 10/01) U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER VER-157XX
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 36 U.S.C. 371		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/089578
INTERNATIONAL APPLICATION NO. PCT/NL00/00695	INTERNATIONAL FILING DATE 29 September 2000 (29.09.2000)	PRIORITY DATE CLAIMED 30 September 1999 (30.09.1999)
TITLE OF INVENTION PROCESS FOR THE REMOVAL OF SULPHUR COMPOUNDS FROM GASES		
APPLICANT(S) FOR DO/EO/US Johannes Borsboom, Petrus Franciscus Maria Theresia van Nisselrooij		
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) (in English) (published application WO 01/23075) <ol style="list-style-type: none"> <input checked="" type="checkbox"/> is attached hereto (required only if not transmitted by the International Bureau). <input checked="" type="checkbox"/> has been communicated by the International Bureau. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(3)). <ol style="list-style-type: none"> <input type="checkbox"/> is attached hereto. <input type="checkbox"/> had been previously submitted under 35 U.S.C. 154(d)(4). <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <input type="checkbox"/> are attached herewith (required only if not transmitted by the International Bureau). <input type="checkbox"/> have been communicated by the International Bureau. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. <input checked="" type="checkbox"/> have not been made and will not be made. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11. to 20. below concern document(s) or information included:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. <u>(with attached copy of International Search Report)</u> <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. <input type="checkbox"/> A substitute specification. <input type="checkbox"/> A change of power of attorney and/or address letter. <input type="checkbox"/> A computer readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825 <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). <input type="checkbox"/> Other items or information: 		

U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/089578		INTERNATIONAL APPLICATION NO PCT/NL00/00695		ATTORNEY'S DOCKET NUMBER VER-157XX	
---	--	--	--	---------------------------------------	--

21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	25 - 20 =	5	X \$18.00	\$ 90.00	
Independent claims	1 - 3 =	0	X \$84.00	\$ 0	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	\$ 0
TOTAL OF ABOVE CALCULATIONS =				\$ 980.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ --	
SUBTOTAL =				\$ 980.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$ 0	
TOTAL NATIONAL FEE =				\$ 980.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
TOTAL FEES ENCLOSED =				\$ 980.00	
				Amount to be Refunded:	\$
				Charged:	\$

a. ☒ A check in the amount of \$ 980.00 to cover the above fees is enclosed. A check in the amount of \$ _____ is enclosed for the assignment recordation fee.


b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23-0804. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Customer Number 207
SEND ALL CORRESPONDENCE TO:

Weingarten, Schurgin, Gagnebin & Lebovici LLP
Ten Post Office Square
Boston, Massachusetts 02109

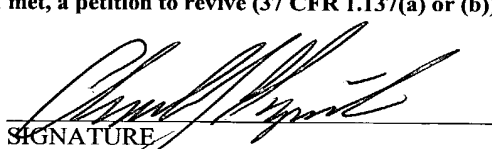
SIGNATURE

NAME: Charles L. Gagnebin III
REGISTRATION NUMBER: 25,467

Date: 3-29-2

10089578/089578

PATENT
JC13 Rec'd PCT/PTO 29 MAR 2002

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application : JOHANNES BORSBOOM, ET AL.
Application No. :
Filed : Herewith
For : PROCESS FOR THE REMOVAL OF SULPHUR
COMPOUNDS FROM GASES
Examiner :
Attorney's Docket : VER-157XX

Group Art Unit:

I hereby certify that this correspondence is being deposited
with the United States Postal Service as first class mail in an
envelope addressed to: Commissioner for Patents, Washington,
D.C. 20231 on _____.

By: _____
Charles L. Gagnebin III
Registration No. 25,467
Attorney for Applicant(s)

PRELIMINARY AMENDMENT

BOX PCT
Commissioner for Patents
Washington, D.C. 20231

Sir:

Kindly enter the following Preliminary Amendment in the
above-identified application:

In the Claims:

WEINGARTEN, SCHURGIN,
GAGNEBIN & LEBOVICI LLP
TEL. (617) 542-2290
FAX. (617) 451-0313

Express Mail Number

EV 009953295 US

Attorney Docket No. VER-157XX
Filed: Herewith
Group Art Unit:

Please amend the Claims to read as follows (a copy of the amended claims showing the additions and deletions appears at the end for the Examiner's convenience):

6. Process according to claim 2, wherein the carrier material is selected from the group of silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).

7. Process according to claim 1, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

8. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 1.

Attorney Docket No. VER-157XX
Filed: Herewith
Group Art Unit:

Please add the following new claims 10-25:

10. Process according to claim 3, wherein the carrier material is selected from the group of silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).

11. Process according to claim 4, wherein the carrier material is selected from the group of silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).

12. Process according to claim 5, wherein the carrier material is selected from the group of silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).

13. Process according to claim 2, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

14. Process according to claim 3, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

Attorney Docket No. VER-157XX

Filed: Herewith

Group Art Unit:

15. Process according to claim 4, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

16. Process according to claim 5, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

17. Process according to claim 6, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

18. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 2.

19. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

Attorney Docket No. VER-157XX
Filed: Herewith
Group Art Unit:

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 3.

20. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 4.

21. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 5.

22. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 6.

23. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 7.

24. Process according to claim 12, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

25. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of

Attorney Docket No. VER-157XX

Filed: Herewith

Group Art Unit:

converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of claim 24.

Attorney Docket No. VER-157XX
Filed: Herewith
Group Art Unit:


REMARKS

This Preliminary Amendment puts the claims into proper form for examination. Note that claims 6-8 have been amended; new claims 10-25 have been added; and claims 1-5 and 9 remain unchanged. Kindly calculate the filing fee based on the amended claims.

The Examiner is encouraged to telephone the undersigned attorney to discuss any matter which would expedite allowance of the present application.

Respectfully submitted,

JOHANNES BORSBOOM, ET AL.

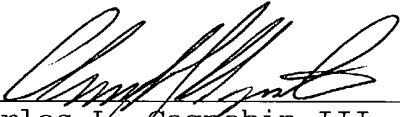By: 
Charles L. Gagnebin III
Registration No. 25,467
Attorney for Applicant(s)

WEINGARTEN, SCHURGIN, GAGNEBIN
& LEOVICI LLP
Ten Post Office Square
Boston, MA 02109
Telephone: (617) 542-2290
Telecopier: (617) 451-0313

Date: 3-29-2

CLG/mc/269853-1
Enclosure

Attorney Docket No. VER-157XX
Filed: Herewith
Group Art Unit:

Red-lined claims for the Examiner's convenience:

6. Process according to claims 2-5, wherein the carrier material is selected from the group of silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).

7. Process according to claims 1-6, wherein the said space velocity is less than 12000 h^{-1} , preferably less than 10000 h^{-1} .

8. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of
converting part of the hydrogen sulphide into sulphur dioxide,

subjecting the mixture to the Claus reaction in at least one catalytic reactor,

subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of ~~any one of the~~ claims 1-7.



Title: Process for the removal of sulphur compounds from gases

The invention relates to a process for the removal of sulphur compounds from gases by catalytic reduction of sulphur dioxide, present in gas mixtures.


The necessity of purifying gases, which are further treated in chemical processes, or supplied to buyers, or discharged to the atmosphere, from sulphur compounds, in particular hydrogen sulphide, is generally known. Accordingly, there exist a number of processes, which are directed towards the removal of hydrogen sulphide from gas.

The best known and most suitable process for removing sulphur from gas by recovering sulphur from hydrogen sulphide is the Claus process. In this process hydrogen sulphide is converted by oxidation to a considerable extent into elemental sulphur; the sulphur thus obtained is separated from the gas by condensation. The residual gas stream (the Claus tail gas) still contains some H_2S and SO_2 .

The method of recovering sulphur from sulphur containing gases by the Claus process is based on the following overall reactions:




Reactions (1) and (2) result in the main reaction:




A conventional Claus converter - suitable for processing gases having an H_2S content of between 50 and 100 % - comprises a burner with a

combustion chamber and a condenser, the thermal stage, followed by a number of reactor stages - generally two or three. These reactor stages constitute the so-called catalytic stages and consist each of a reactor filled with catalyst and a sulphur condenser.

5 In the thermal stage, the incoming gas stream, which is rich in H_2S , is combusted with an amount of air, at a temperature of approximately 1200°C . This amount of air is adjusted so that one third of the H_2S is fully combusted to form SO_2 in accordance with the following reaction:




After this partial oxidation of H_2S the non-oxidised part of the H_2S (i.e. basically two-thirds of the amount offered) and the SO_2 formed react further to a considerable portion, in accordance with the Claus reaction



The gases coming from the combustion chamber are cooled to about 160°C in a sulphur condenser, in which the sulphur formed is condensed, which subsequently flows into a sulphur pit through a siphon.


20 Thus, in the thermal stage, approximately 60 % of the H_2S is converted into elemental sulphur.

The non-condensed gases, in which the molar ratio of $\text{H}_2\text{S} : \text{SO}_2$ is unchanged and still 2 : 1, are subsequently heated to about 250°C , and passed through a first catalytic reactor in which the equilibrium



is established.

5 In the Claus process, H_2S is not quantitatively converted to elemental sulphur, mainly due to the fact that the Claus reaction is an equilibrium reaction and therefore the conversion of H_2S and SO_2 to elemental sulphur is not complete:



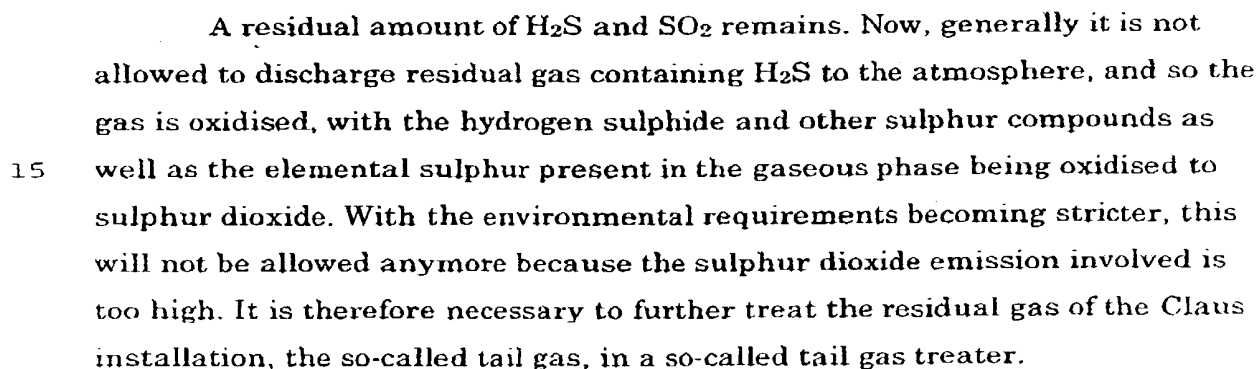


The SCOT process is an effective process for the treatment of tail gas (See GB-A-1, 356,289). In this process the tail gas, together with hydrogen, is passed over a cobalt oxide/molybdenum oxide catalyst on an Al_2O_3 carrier, all sulphur components present thus being catalytically reduced to H_2S . The total amount of H_2S is then separated from the Claus tail gas in a conventional manner by absorption in a suitable liquid. The H_2S is recovered from the liquid absorbent and recycled to the Claus thermal stage. One drawback of the

SCOT process is that it requires an expensive and complicated installation. Another drawback is the high energy consumption involved in removing the hydrogen sulphide from the absorbent again.

In the SCOT process a hydrogenation catalyst is used which is based
5 on a carrier material, usually $\gamma\text{-Al}_2\text{O}_3$ with a high specific catalytic surface area of typically more than $300 \text{ m}^2/\text{g}$, the carrier material being provided with active compounds such as molybdenum, cobalt and/or nickel for the hydrogenation function. In the SCOT hydrogenation reactor all sulphur components are converted to H_2S according to

10



In this process it is essential that all sulphur species are converted to
20 H_2S down to the ppmv level over the hydrogenation catalyst, in order to prevent corrosion and plugging with solid sulphur in downstream equipment. For instance, partial catalytic hydrogenation of SO_2 to sulphur vapour or a mixture of sulphur vapour and H_2S is not allowed for the SCOT process. In order to achieve complete hydrogenation to hydrogen sulphide and complete
25 hydrolysis of COS and CS_2 , high catalyst bed temperatures in the range of $280\text{-}330^\circ\text{C}$, as well as low space velocities are required. A process of this kind, using complete conversion of the sulphur species to hydrogen sulphide is described in GB-A 1,480,228.

An alternative way to remove hydrogen sulphide from tail gas is partial oxidation to elemental sulphur, as in the so-called BSR Selectox process, described in

US-A 4,311,683. According to this process the Claus tail gas is hydrogenated,
5 water is removed and the H_2S containing gas, mixed with oxygen, is passed over a catalyst containing vanadium oxides and vanadium sulphides on a non-alkaline, porous, refractory oxidic carrier.

An important drawback of both the SCOT process and the BSR Selectox process is that in both cases the tail gas, after hydrogenation of the
10 sulphur components to H_2S , must first be cooled in order to remove the water for the greater part. Water greatly interferes with the absorption or the oxidation of H_2S . Due to the high investments involved, the costs of tail gas treatments according to these known methods are high.

In the SUPERCLAUSTM process the Claus tail gas is subjected to
15 further treatment, whereby H_2S present in the tail gas is selectively oxidised to elemental sulphur in a dry bed oxidation stage.

In US patent specification No. 4,988,494, one of the basic patents for the SUPERCLAUSTM process, it is described that the H_2S concentration in the gas leaving the last catalytic Claus stage is increased to a value ranging
20 between 0.8 and 3 % by volume by reducing the quantity of combustion or oxidation air passed to the Claus thermal stage.

The increase of the H_2S concentration in the Claus tail gas, will result in a decreased SO_2 concentration in said tail gas, however, not to very low levels. For an H_2S concentration of 0.8 % by volume, the SO_2 concentration will
25 be typically 0.03 - 0.15 % by volume, and this will still result in a sulphur recovery efficiency loss of typically 0.09 - 0.45 %.

In EP-A 669,854 a process for sulphur recovery is described which makes use of selective hydrogenation of SO_2 to elemental sulphur. This patent suggests the use of a cobalt-molybdenum catalyst on a γ -alumina support, as is
30 used in the SCOT process.

During the Fourth Sulfur Technology Conference, November 5-6, 1998, Houston, TX, USA, a paper has been presented, "PROClaus Process: An Evolutionary Enhancement to Claus Performance". In this paper the selective hydrogenation of SO_2 in Claus tail gas to elemental sulphur is described, using
5 a catalyst in the last catalytic Claus reactor which is basically a Claus catalyst with additional hydrogenating properties. This hydrogenation stage is followed by selective oxidation of H_2S to elemental sulphur.

In order to perform selective hydrogenation of SO_2 to sulphur vapour instead of to hydrogen sulphide, the temperature of the gas should be reduced
10 significantly and the ratio of hydrogen to sulphur dioxide should be low. However, the data in the paper show that the reduced temperature needed for a sufficiently selective conversion to sulphur, results in a decrease of overall SO_2 conversion.


The process of selective reduction to elemental sulphur is thus rather
15 restricted in process conditions and requirements, with the consequence, that difficult and costly measures are required to meet the criteria for the selective reduction to elemental sulphur. One example thereof is the necessary reduction of the H_2 -content of the gas mixture. A further disadvantage of the proposed process resides therein, that the temperature needs to be high,
20 because of the required conversion of SO_2 . High temperatures promote the reaction of elemental sulphur vapour with hydrogen, resulting in decreased yields to sulphur. As a result the product gas of this PROClaus process is still relatively rich in H_2S and SO_2 .

Accordingly, this process of selective hydrogenation of SO_2 to elemental
25 sulphur is not a viable alternative for providing an increase in sulphur yield.

Even though these considerations direct the skilled person away from using a hydrogenation step in relation to treatment of Claus tail gas, the inventors have realised, that the hydrogenation of sulphur dioxide might provide a new way to improve the sulphur recovery from Claus tail gases.

An important aspect in this is the fact that Claus tail gas contains a considerable amount of water vapour, which amount may be within the range of 10-40% by volume. The water vapour strongly promotes the reversing Claus reaction.

5



The effectiveness with respect to the removal of SO_2 by selective conversion to elemental sulphur can in general be adversely affected by the
10 occurrence of reaction 2^c.

The sulphur formed by SO_2 reduction, reacts back with the water vapour to form hydrogen sulphide and sulphur dioxide.

The substantial removal of water vapour has evident technical disadvantages, such as the necessity of an additional cooling/heating stage, an
15 additional sulphur removal stage or a hydrogenation stage followed by a water-removing quench stage.




The occurrence of the side reaction mentioned above is partly determined by practical conditions, such as temperature, contact time, water vapour content, sulphur vapour content and catalytic activity, and has the
20 effect that the sulphur yield is decreased.

The present invention has accordingly as one of its objects to provide a process for the removal of sulphur compounds from gas mixtures, in an economic manner, without too much unit operations being necessary. Another object is to improve the sulphur recovery from Claus tail gases, compared to
25 conventional methods. Also it is an object to provide a process for the reduction of sulphur dioxide to hydrogen sulphide and/or elemental sulphur in water containing gas mixtures, which process is suitable for incorporation in various sulphur recovery processes, to improve the sulphur recovery therewith.

One further object is to prevent that too much sulphur vapour that is already present in Claus tail gas is hydrogenated, resulting in a further load to the subsequent selective oxidation.

The present invention is based on the discovery that the hydrogenation of SO₂ in Claus tail gas to H₂S and/or to elemental sulphur, followed by the selective oxidation of H₂S to elemental sulphur, can be used as a means for the removal of SO₂, in an efficient manner. It has been found that the sulphur recovery can be improved by suppressing the side reactions leading back to the generation of SO₂ and H₂S. This can be done in various ways, the most important ones being the use of the reaction kinetics and the use of a catalyst that is not active in promoting the Claus reaction.

The reduction of SO₂ and sulphur vapour according to



is thermodynamically complete and is not reversible, in contrast to the Claus reaction.

It has been found that the reduction of SO₂ (equations 8, 4 and 9) proceeds faster than the reaction of sulphur vapour and hydrogen to H₂S. By applying a sufficiently high space velocity, the majority of the SO₂ is reduced, without the need to restrict the amount of hydrogen and/or CO in the system or to lower the temperature.

The invention accordingly relates to a process for the removal of sulphur dioxide from a gas mixture at least containing 10 vol.% of water, in which process the gas mixture is passed over a sulphur resistant hydrogenation catalyst in sulphidic form, at a space velocity (Gas Hourly Space Velocity: GHSV) of at least 2000 h⁻¹, in the presence of a reducing

component, preferably at least partly consisting of hydrogen, in a molar ratio of reducing component to sulphur dioxide of more than 10 up to 100, at a temperature of 125°C to 300°C, followed by passing the gas mixture, after the said reduction, through a dry oxidation bed for the oxidation of sulphur compounds, more in particular hydrogen sulphide, to elemental sulphur.

The invention is also concerned with a process for the removal of hydrogen sulphide from gas mixtures, said process comprising the steps of

- converting part of the hydrogen sulphide into sulphur dioxide,
- subjecting the mixture to the Claus reaction in at least one catalytic reactor,
- subjecting the sulphur dioxide present in the resultant gas mixture to a catalytic reduction step using the above described process, and
- selectively oxidising the hydrogen sulphide present in the resulting gas mixture to elemental sulphur.

The present invention is based on the surprising discovery, that by careful selection of process conditions, it is possible to remove sulphur dioxide from a gas mixture containing substantial amounts of water, without difficulty, and without the need of difficult measures to obtain the correct process conditions, such as gas composition. The process of the present invention, in view of its carefully balanced optimal process conditions, allows the hydrogenation and subsequent conversion to elemental sulphur, of sulphur dioxide in various gas mixtures, such as Claus tail gas. More in particular the present invention allows the operation of the process within a suitable window of operating conditions, while obtaining a suitably high level of sulphur recovery.

In the process of the invention, the use of the additional hydrogenation step with the specific process conditions leads to a greatly improved system for sulphur recovery. Not only is the sulphur recovery increased due to the additional amount of SO_2 that is converted, but also the process allows the Claus process to operate more efficiently, as it is not

necessary to control the process air to the thermal stage at an increased hydrogen sulphide level in the tail gas going to the selective oxidation reactor. This results in a higher conversion in the Claus process (higher sulphur recovery efficiency). This increased conversion in the Claus process lowers the
5 load in the selective oxidation step, which again is advantageous for the sulphur yield in the selective oxidation step.

It is thus clear that the specific combination of features of the present invention provides for a greatly improved operation of the process and greatly increased sulphur yield. A further aspect resides therein, that the
10 process control is easier than in the prior art tail gas treatment processes. In general it can be said that the present invention provides therefor that the operation of the various process steps falls better in the operating window (for example because of lower load), thus enabling a better performance of the process step. Further, the gas fed to the selective oxidation step contains less
15 SO_2 , which has the consequence that a lower starting temperature can be used in the selective oxidation step, which is advantageous for the sulphur yield.

It is to be noted, that the hydrogenation of sulphur dioxide will proceed at least partly to hydrogen sulphide, although also elemental sulphur may be formed. The present inventors have been the first to realise that, when using
20 the catalytic hydrogenation reaction of SO_2 , it is important for the sulphur yield that the reverse Claus reaction is suppressed, at least by the selected reaction conditions and preferably also by the properties of the catalyst.

One of the advantages of using the invention resides in the fact that a high conversion of SO_2 is obtained at a low temperature, whereas at the same
25 time only a low conversion of sulphur vapour into H_2S is maintained, in the presence of substantial amounts of water vapour.

Important considerations in the process are i.a. the space velocity, which should be at least 2000 h^{-1} , which is very high compared to conventional Claus and Claus tail gas processes. Space velocity is defined as $\text{Nm}^3 \text{ gas/m}^3$

catalyst/hour. The upper limit can generally be kept below 12000 h⁻¹, more preferred below 10000 h⁻¹.

In the gas containing SO₂, also CO is usually present. Because of the reducing properties of CO, this component is capable of reducing SO₂. In this way CO acts in the same way as hydrogen, and a mixture of hydrogen and CO is therefor also suitable for reducing SO₂, either directly (Eq. 9) or indirectly via H₂ production in the water-gas shift reaction (Eq. 10).



In order to obtain a good and fast reduction, the amount of reducing component (hydrogen and/or CO), should be high; on molar basis more than 10 times the amount of sulphur dioxide. The advantage thereof is that there is a fast and efficient removal of SO₂.

Excess of hydrogen compared to SO₂ is normally present in the Claus tail gas of a sulphur recovery unit. The hydrogen in the tail gas is produced in the thermal stage of the sulphur plant, one of the main reactions for hydrogen production being the thermal cracking of H₂S



The excess of hydrogen compared to SO₂ in the Claus tail gas is determined by the Claus process, and cannot be controlled easily. In case additional hydrogen is required, this can be generated by sub-stoichiometric combustion of fuel gas in the in-line reheaters, or added to the tail gas in the form of a concentrated hydrogen stream from outside battery limits. Removal of hydrogen, as is necessary for the selective reduction of SO₂ to elemental sulphur as described in EP-A 669,854, is very difficult and cost ineffective.

According to the present invention it is not relevant whether sulphur dioxide is converted to hydrogen sulphide or to elemental sulphur.

The process of the invention has the advantage that little or no hydrogenation of sulphur vapour, coming from the Claus unit occurs, which
5 would otherwise lead to a further load of the subsequent oxidation stage.

The catalyst to be used in the present invention should be catalytically active in the hydrogenation of SO_2 to elemental sulphur and/or to H_2S . Generally this means that the catalyst preferably consists of a support and a catalytically active material.

10 As an effective catalytically active material at least one Group VIB, VIIB or VIII, preferably a molybdenum or tungsten compound is used, or a mixture of molybdenum, tungsten, nickel and cobalt compounds, optionally in combination with one or more promoting compounds of non-metals.

The active component is present on the carrier in an amount preferably
15 in the range of 0.1-40% by weight, more preferably 0.1-10% by weight calculated on the total weight of the catalyst, and 60-99.9% of a carrier material.


The catalyst has to be in the sulphided form in order to be suitable. Sulphided catalysts are known as such. Generally, sulphiding is done by
20 contacting the catalyst with H_2S , an organic sulphur containing compound, such as dimethyl-disulphide or sulphur, prior to use. The catalyst may contain one or more promoting materials. Suitable promoting materials according to the invention are phosphorus compounds. These can be applied to the catalyst inter alia by impregnation with a soluble phosphorus compound.

25 It is preferred to use for the reduction step a catalyst on a support, said support having substantially no activity towards the Claus reaction, as defined later on. By this aspect of the invention a further improvement of the sulphur recovery occurs, in view of the absence of the reverse Claus reaction, which reaction would result in the production of SO_2 . More in particular this
30 embodiment is of importance in the case that the Claus tail gas contains


substantial amounts of CO (i.e. over 0.5 % by vol). It has been found that the production of COS, an undesired by-product, leading to a decrease in the sulphur recovery, is strongly depressed by the use of a hydrogenation catalyst having substantially no catalytic activity towards the Claus reaction.

5 The properties required of the support material (concerning Claus activity) depend on the embodiment. In case the Claus activity of the support is not very important, any conventional support for a hydrogenation catalyst may be used. In the preferred embodiment discussed here above, the support consists of a material that is not active towards the Claus reaction. Suitable
10 supports therefor are, i.a. silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).

 It is noted that in the present invention the absence of Claus activity is defined in the experimental part, preceding the examples. This definition of the Claus activity is based on direct measurement of the Claus reaction
15 activity, according to the reaction



 If a material is Claus active, the presence of water results in the
20 reaction taking place in the direction of H_2S and SO_2 , with a part of the sulphur being converted to H_2S and SO_2 again. SO_2 is then hydrogenated with the H_2 present to sulphur and water vapour, whereafter the Claus active catalyst converts the sulphur back into SO_2 . Due to the concurrence of these reactions a catalyst with Claus active sites will in the presence of water give
25 rise to a strong decrease in conversion, according to



10089576 .031202

The specific surface area of the catalyst according to the invention can be considerably higher than at least 5 m²/g, since a good activity can be obtained with such values. However, it is also possible to use a catalyst having a low BET surface area, such as α -alumina based hydrogenation catalysts.

5 Preferably, the specific surface area of the catalyst will not be larger than 300 m²/g of catalyst. In general no specific additional advantages are gained with higher values.

Within the scope of the invention "specific surface area" means the BET surface area as defined by S. Brunauer et al., in J.A.C.S. 60, 309 (1938).

10 The BET surface area is determined by nitrogen adsorption at 77 K according to the so-called three-point measurement. In the calculation the surface area of a nitrogen molecule is set at 16.2 Å².

In principle the catalysts can be prepared by the known methods of preparing (supported) catalysts.

15 According to the process of the invention sulphur dioxide is removed by reduction, by passing a sulphur dioxide containing gas together with a reducing agent containing gas over the sulphided catalyst at an elevated temperature.

20 The reduction is carried out by adding such an amount of reduction component, such as hydrogen or an hydrogen containing gas, to the sulphur dioxide containing gas, using a known per se ratio regulator, that the molar ratio of reduction component to sulphur dioxide is from more than 10, up to 100, and preferably up to 50.

25 The process according to the invention can be used for the treatment of all gases, which comprise sulphur dioxide.

The process according to the invention is eminently suitable for treatment of gas mixtures which do not contain more than 1.0% of SO₂, because then a normal, adiabatically operating reactor can be used.

30 In the hydrogenation the inlet temperature of the catalyst bed is selected above 125°C and preferably above 170°C. This temperature is partly

dictated by the requirement that the temperature of the catalyst bed should be above the solidification temperature of liquid sulphur (115°C) and also above the dew point temperature of the sulphur.

By known per se measures the maximum temperature in the catalyst
5 bed is generally maintained below 300°C and preferably below 250°C.

If the SO₂ content is higher than 1.0% by volume it may be necessary to take steps in order to prevent the temperature in the hydrogenation reactor from becoming too high due to the reaction heat released. Such steps include for instance the use of a cooled reactor, for instance a tubular reactor, where
10 the catalyst is in a tube which is surrounded by a coolant. Such a reactor is known from European patent specification 91551. A reactor containing a cooling element may also be employed. Further, it is possible to return the treated gas to the reactor inlet after cooling, and thus an additional dilution of the gas to be hydrogenated is attained.

15 The process according to the invention can be utilised with particular advantage for the hydrogenation of the sulphur dioxide containing residual gases coming from a Claus plant. Because of the very high selectivity of the catalyst for the reduction of SO₂, compared to the reverse Claus reaction, a very important additional advantage is thus obtained in that the removal of
20 water prior to the hydrogenation is no longer required. If the process according to the invention is used to oxidise the residual gases referred to, these gases are passed directly to a selective oxidation stage.

If in the process according to the invention the sulphur vapour containing gas coming from the hydrogenation stage, optionally after
25 condensation and separation of the greater part of the sulphur, is passed over a bed in which the sulphur is removed by capillary absorption, or the gas is further cooled in a so-called Deep Cooler to below the solidification temperature of sulphur, see European application 0655414, the sulphur recovery percentage is increased to more than 99.5%.

In a particularly preferred embodiment the catalyst of the invention is used as a separate bed close to the outlet of the last (second) catalytic Claus reactor. Because of the careful selection of process conditions, the use of such a bed results in a particularly efficient hydrogenation of substantially only the sulphur dioxide to hydrogen sulphide. A further advantage of this embodiment
5 resides therein, that it is not necessary to install an additional reactor in an existing plant. Instead thereof only a thin layer of catalyst can be placed in the bottom of the said last reactor, using the prevailing reaction conditions in the reactor. Thereby the sulphur dioxide is hydrogenated.

Experimental part

The Claus activity of a carrier material is established by the following test.

5 A tubular quartz reactor, with an internal diameter of 15 mm, is filled with 4 ml of the carrier material. On the one hand, the carrier particle size should be less than 10% of the internal reactor diameter and, on the other hand, it should be sufficiently large to avoid excessive pressure drop across the reactor. Such particles may be obtained by compressing a carrier powder into
10 tablets, subsequently crushing the tablets and sieving the crushed material with sieves of the appropriate mesh size. Carrier materials in the shape of, for instance, extrusions or beads can simply be crushed and sieved to the appropriate size.

 The filled reactor is placed in a furnace, which ensures an isothermal
15 temperature profile along the axis of the carrier bed. The reactor temperature is measured by an axially placed thermocouple in the bottom, i.e. the outlet side, of the carrier bed.

 The carrier bed is heated to 225 °C in a helium flow, at atmospheric pressure and a GHSV of 6000 Nm³ gas/ m³ carrier bed/ hour. At 225 °C, a mixture of 1
20 vol% H₂S and 0.5 vol% SO₂ in helium is contacted with the carrier bed, at atmospheric pressure and a GHSV of 6000 Nm³/m³/h.

 Sulphur vapour produced in the Claus reaction is removed from the product gas by condensation at 120 °C. Subsequently, the sulphur free gas is dried. Methods to remove water vapour from gases are well known to persons skilled
25 in the art. The H₂S and SO₂ concentrations in the dry product gas are determined by gas chromatographic analysis.

 After a stabilisation period of 24 hours, at 225 °C, the product gas is analysed and the H₂S and SO₂ conversions are calculated by approximation from the product gas analysis by the following formulas:

H₂S conversion =

$$\frac{[(\text{vol\% H}_2\text{S-reactor-in} - \text{vol\% H}_2\text{S-in-dry-product-gas}) / (\text{vol\% H}_2\text{S-reactor-in})] * 100\%}{}$$

SO₂ conversion =

5 $\frac{[(\text{vol\% SO}_2\text{-reactor-in} - \text{vol\% SO}_2\text{-in-dry-product-gas}) / (\text{vol\% SO}_2\text{-reactor-in})] * 100\%}{}$

From this the average conversion is calculated:

$$\text{average conversion} = (\text{H}_2\text{S conversion} + \text{SO}_2 \text{ conversion}) / 2$$

10 A carrier material is considered to have no substantial Claus activity if the average conversion is less than 20%.

Commercially available carrier materials almost invariably exhibit some Claus activity, even if the chemically pure carrier material is theoretically Claus inactive (viz. silica). This is due to traces of precursor materials from which the carrier is produced, or the presence of residual
15 amounts of additives, for instance binders, which have been used to shape the carrier material.

Examples

20 **Example 1**

A commercial $\gamma\text{-Al}_2\text{O}_3$ catalyst carrier material was tested for Claus activity in an isothermal reactor according to the procedure described in the experimental part. $\gamma\text{-Al}_2\text{O}_3$ is well known for its Claus activity. The test data
25 are summarised in table 1.

Table 1

Feed gas	1 vol% H ₂ S, 0.5 vol% SO ₂ in He
GHSV	6000 Nm ³ /m ³ /h
Reactor temperature	225 °C
Claus activity = average H ₂ S and SO ₂ conversion to sulphur	94.5%

5 Example 2

A commercial silica carrier material was tested for Claus activity as in example 1. With this material the average H₂S and SO₂ conversion to sulphur was 12.5%.

10

Example 3

A Claus process gas containing 1.89 vol% H₂S, 0.62 vol% SO₂, 3.85 vol% H₂, 1.33 vol% CO and 30 vol% H₂O was contacted with a standard Claus catalyst at 220 °C, atmospheric pressure and a GHSV of 870 Nm³/m³/h. The product gas was fed to an isothermal reduction reactor, in series with the Claus reactor, containing a sulphided Co/Mo catalyst on a γ -Al₂O₃ carrier as in example 1. The fresh catalyst, in oxidised form (i.e. before sulphidation), contained 4 wt% CoO and 12 wt% MoO₃, based on the total weight of the catalyst. The B.E.T. surface area was 225 m²/g catalyst. The reactor temperature was set at 225 °C. The product gas composition was determined at three different GHSV's: 3000, 6000 and 9000 Nm³/m³/h. The results are shown in table 2.

15

20


With the Co/Mo catalyst on Claus active $\gamma\text{-Al}_2\text{O}_3$ considerable amounts of COS are formed under the prevailing experimental conditions.

Table 2

5

Component	Reduction reactor in	Reduction reactor out		
		GHSV = 3000 Nm ³ /m ³ /h	GHSV = 6000 Nm ³ /m ³ /h	GHSV = 9000 Nm ³ /m ³ /h
H ₂ S (vol%)	0.82	1.35	1.00	0.82
SO ₂ (vol%)	0.076	0.005	0.010	0.011
COS (vol%)		0.083	0.043	0.042
S-vapour (vol% S ₁)	1.64	1.10	1.48	1.66
H ₂ (vol%)	3.85			
CO (vol%)	1.33			
H ₂ O (vol%)	31.1			

The SO₂ conversion is the net result of kinetically determined reduction and back formation from sulphur by the reversing Claus reaction:



Under the test conditions, the sulphur vapour in the feed and product gas is a mixture of mainly S₂, S₆ and S₈. The average value of n in S_n at 225 °C is 7.42.

From thermodynamic data it can be calculated that, at a temperature of 225 °C, the natural logarithm of the equilibrium constant for the reversing Claus reaction is:

$$\ln(K_p) = \ln\{[(\text{vol\% H}_2\text{S}/100)^2 \times (\text{vol\% SO}_2/100)] / [(\text{vol\% S}_{7.42}/100)^{37.42} \times (\text{vol\% H}_2\text{O}/100)^2]\} = -11.77$$

From the composition of the product gas leaving the reduction reactor an apparent $\ln(K_p)$ value can be calculated.

For the CoMo/ γ -Al₂O₃ catalyst the apparent $\ln(K_p)$ values are -13.54, -13.57 and -13.92, at space velocities of 3000, 6000 and 9000 Nm³/m³/h respectively.

At low space velocity, the apparent $\ln(K_p)$ approaches the thermodynamic equilibrium value, indicating an increasing influence of the Claus reaction. Although the SO₂ content in the product gas is still low, due to the high reduction activity, the interference with the reversing Claus reaction, suppresses the SO₂ conversion to some extent.

At high space velocities, the apparent $\ln(K_p)$ deviates more and more from the thermodynamic equilibrium value. In this regime, the SO₂ conversion is determined by the kinetics of the reduction reaction.

Example 4

The experiment as in example 3 was repeated with sulphided Mo on the same silica carrier as tested in example 2. The fresh catalyst, in oxidised form, contained 6 wt% MoO₃, based on the total weight of the catalyst. The B.E.T. surface area was 250 m²/g catalyst. As was shown in example 2, the silica carrier exhibits no substantial Claus activity.

The product gas composition was determined at two GHSV's: 6000 and 9000 Nm³/m³/h. The results are shown in table 3.

Compared to Co/Mo on Claus active γ -Al₂O₃, the catalyst on Claus inactive silica produces far less COS.

The apparent $\ln(K_p)$ values at 6000 and 9000 $\text{Nm}^3/\text{m}^3/\text{h}$ are -14.25 and -13.84 respectively. These figures clearly show that the SO_2 conversion is less influenced by Claus activity than Co/Mo on $\gamma\text{Al}_2\text{O}_3$, resulting in significantly lower SO_2 emissions from the reduction reactor at medium space velocity. At the high end of the space velocity range, the kinetics of SO_2 reduction is the limiting factor. Therefore, the performance of both catalysts is roughly the same at 9000 $\text{Nm}^3/\text{m}^3/\text{h}$.

Table 3

Component	Reduction reactor in	Reduction reactor out	
		GHSV = 6000 $\text{Nm}^3/\text{m}^3/\text{h}$	GHSV = 9000 $\text{Nm}^3/\text{m}^3/\text{h}$
H_2S (vol%)	0.82	1.06	0.82
SO_2 (vol%)	0.076	0.0045	0.012
COS (vol%)		0.0081	0.0086
S-vapour (vol% S_1)	1.64	1.46	1.69
H_2 (vol%)	3.85		
CO (vol%)	1.33		
H_2O (vol%)	31.1		

Example 5

The experiment as in example 3 was repeated with a sulphided commercial Co/Mo catalyst on $\gamma\text{-Al}_2\text{O}_3$. The fresh catalyst, in oxidised form,

contained 2.5 wt% CoO and 9 wt% MoO₃, based on the total weight of the catalyst. The B.E.T. surface area was 330 m²/g catalyst.

The product gas composition was determined at two GHSV's: 3000 and 9000 Nm³/m³/h. The results are shown in table 4.

5 Compared to Co/Mo catalyst on γ -Al₂O₃ in example 3, the commercial Co/Mo/ γ -Al₂O₃ catalyst, with a different Co and Mo content and surface area, exhibits the same behaviour.

The commercial catalyst also produces considerable amounts of COS. The apparent ln(Kp) values are -13.38 and -14.13, at space velocities of 3000 and 9000 Nm³/m³/h respectively. At low space velocity, the SO₂ conversion is
10 therefore limited by interference with the reversing Claus reaction, as was the case with the Claus active catalyst in example 3

Table 4

15

Component	Reduction reactor in	Reduction reactor out	
		GHSV = 3000 Nm ³ /m ³ /h	GHSV = 9000 Nm ³ /m ³ /h
H ₂ S (vol%)	0.82	1.20	0.82
SO ₂ (vol%)	0.076	0.0080	0.0090
COS (vol%)		0.0175	0.0255
S-vapour (vol% S ₁)	1.64	1.31	1.68
H ₂ (vol%)	3.85		
CO (vol%)	1.33		
H ₂ O (vol%)	31.1		

Example 6

The experiment as in example 3 was repeated with a sulphided commercial Ni/Mo catalyst on Claus active γ -Al₂O₃. The composition of the catalyst in oxidised form was specified as NiO: < 25 wt% and MoO₃: 10-25 wt%, based on the total weight of the catalyst.

The product gas composition was determined at two GHSV's: 3000 and 9000 Nm³/m³/h. The results are shown in table 5.

Table 5

Component	Reduction reactor in	Reduction reactor out	
		GHSV = 3000 Nm ³ /m ³ /h	GHSV = 9000 Nm ³ /m ³ /h
H ₂ S (vol%)	0.82	1.40	0.85
SO ₂ (vol%)	0.076	0.0070	0.0175
COS (vol%)		0.0502	0.0300
S-vapour (vol% S ₁)	1.64	1.08	1.64
H ₂ (vol%)	3.85		
CO (vol%)	1.33		
H ₂ O (vol%)	31.1		

Under the prevailing experimental conditions, Ni/Mo on γ -Al₂O₃ produces considerable amounts of COS. The apparent $\ln(K_p)$ values for Ni/Mo-

$\gamma\text{Al}_2\text{O}_3$ are -13.13 and -13.38 , at space velocities of 3000 and $9000 \text{ Nm}^3/\text{m}^3/\text{h}$ respectively, indicating interference with the reversing Claus reaction.

From the experiments in example 3, 5 and 6 it follows that all catalysts on $\gamma\text{-Al}_2\text{O}_3$ exhibit basically the same behaviour, despite differences in metal
5 oxide composition.

With each of these catalysts both the production of COS and the reversing Claus reaction interfere significantly with the reduction of SO_2 to H_2S and/or sulphur, as opposed to Mo on silica.

This clearly indicates that Claus activity of the carrier material is a
10 determining factor in the catalyst performance.

Example 7

The effect of the CO content in the feed gas on COS formation was
15 tested in the following experiment

A Claus process gas containing 2 vol% H_2S , 1 vol% SO_2 , 3.85 vol% H_2 , 30 vol% H_2O and a variable amount of CO was contacted with a standard Claus catalyst at 225°C , atmospheric pressure and a GHSV of $870 \text{ Nm}^3/\text{m}^3/\text{h}$. The product gas was fed to an isothermal reduction reactor containing a
20 sulphided Co/Mo catalyst on $\gamma\text{-Al}_2\text{O}_3$, identical to the catalyst in example 5. The COS content of the product gas from the reduction reactor was determined at a reactor temperature of 225°C and a GHSV of $3000 \text{ Nm}^3/\text{m}^3/\text{h}$. The results are shown in table 6.

Table 6

Vol% CO in the feed gas to the reduction reactor	Vol% COS in product gas from the reduction reactor
1.34	0.0313
0.70	0.0082

The experiment shows that the COS production drops very rapidly
5 with decreasing CO content of the feed gas.

It follows from this example that, when maximum SO₂ conversion is
not required, catalysts on Claus active carriers perform satisfactory with feed
gases having a low CO content. For high SO₂ conversions and feed gases
10 having a high CO content, a catalyst on a Claus inactive carrier is preferred.

Example 8

15 A gas containing 0.83 vol% H₂S, 0.074 vol% SO₂, 30 vol% H₂O, 3.85
vol% H₂ and 1.35 vol% CO was contacted, at 225 °C, with sulphided CoMo on γ
-Al₂O₃, identical to the catalyst in example 5. The feed gas was virtually
identical to the feed gas of the reduction reactor in example 5. However, in the
experiment of the present example, the feed gas contained no sulphur vapour.

20 The product gas composition was determined at two GHSV's: 3000 and
6000 Nm³/m³/h. The results are shown in table 7

Table 7

Component	Reduction reactor in	Reduction reactor out	
		GHSV = 3000 Nm ³ /m ³ /h	GHSV = 6000 Nm ³ /m ³ /h
H ₂ S (vol%)	0.83	0.89	0.89
SO ₂ (vol%)	0.074	0.00	0.00
COS (vol%)		0.015	0.016
S-vapour (vol% S ₁)	0		
H ₂ (vol%)	3.85		
CO (vol%)	1.35		
H ₂ O (vol%)	30		

Comparison of table 4 and table 7 shows that hydrogenation of sulphur vapour is a major factor in the production of H₂S at low space velocities. With sulphur free feed gas, the H₂S content in the product gas decreases from 1.2 to 0.9 vol%. With no sulphur in the feed, the SO₂ content of the product gas drops below the detection level, due to the reduced conversion of sulphur vapour to H₂S and SO₂ in the reversing Claus reaction.

10

From this example it follows that for extremely high SO₂ conversion and minimum loss of sulphur recovery a separate reduction reactor with a preceding sulphur condenser is preferred over an integrated reactor, filled with two stacked layers of respectively a Claus catalyst and a reduction catalyst.

Claims

1. Process for the catalytic reduction of sulphur dioxide from a gas mixture at least containing 10 vol.% of water, in which process the gas mixture is passed over a sulphur resistant hydrogenation catalyst in sulphidic form, at a space velocity of at least 2000 h⁻¹, in the presence of a reducing component, preferably at least partly consisting of hydrogen, in a molar ratio of reducing component to sulphur dioxide of more than 10 up to 100, at a temperature of 125°C to 300°C, followed by passing the gas mixture, after the said reduction, through a dry oxidation bed for the oxidation of sulphur compounds, more in particular hydrogen sulphide, to elemental sulphur.
- 10 2. Process according to claim 1, wherein the catalyst is supported on a carrier material having substantially no activity towards the Claus reaction and having at least one sulphidic hydrogenation component applied to the surface of said carrier material.
3. Process according to claim 2, wherein the said hydrogenation component is selected from the group of metals of Groups VIB, VIIB and VIII of the periodic table of elements.
- 15 4. Process according to claim 3, wherein the hydrogenation component is based on molybdenum, and/or tungsten and/or cobalt.
5. Process according to claim 4, wherein the hydrogenation component is a catalyst based molybdenum or tungsten on a silica support, preferably containing 0.1 to 50 wt.% of molybdenum or tungsten.
- 20 6. Process according to claims 2-5, wherein the carrier material is selected from the group of silica, α -alumina, silica alumina, zirconia, carbon (fibres), carbides, phosphates (such as aluminium phosphate).
- 25 7. Process according to claims 1-6, wherein the said space velocity is less than 12000 h⁻¹, preferably less than 10000 h⁻¹.

8. Process for the removal of sulphur contaminants from gas mixtures, said process comprising the steps of
- converting part of the hydrogen sulphide into sulphur dioxide,
 - subjecting the mixture to the Claus reaction in at least one catalytic
- 5 reactor,
- subjecting the sulphur dioxide present in resultant gas mixture to a removal step using the process of any one of the claims 1-7,
 - selectively oxidising the hydrogen sulphide present in the resulting
- 10 9. Process according to claim 8, wherein the said step of selectively oxidising is carried out in a dry oxidation bed.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23075 A1

- (51) International Patent Classification⁷: **B01D 53/86**, C01B 17/04
- (74) Agent: PRINS, A., W.; Vereenigde, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).
- (21) International Application Number: PCT/NL00/00695
- (22) International Filing Date:
29 September 2000 (29.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
99203194.8 30 September 1999 (30.09.1999) EP
- (71) Applicants (for all designated States except US):
GASTEC N.V. [NL/NL]; Wilmersdorf 50, NL-7327 AC Apeldoorn (NL). STORK ENGINEERS & CON-TRACTORS B.V. [NL/NL]; Radarweg 60, NL-1043 NT Amsterdam (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BORSBOOM**, Johannes [NL/NL]; Frans Halskade 104, NL-2282 VC Rijswijk (NL). **VAN NISSELROOIJ**, Petrus, Francis-cus, Maria, Theresia [NL/NL]; Van Welderenstraat 50, NL-6511 MN Nijmegen (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- With international search report.
 - Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS FOR THE REMOVAL OF SULPHUR COMPOUNDS FROM GASES

(57) Abstract: The invention is directed to a process for the catalytic reduction of sulphur dioxide from a gas mixture at least containing 10 vol. % of water, in which process the gas mixture is passed over a sulphur resistant hydrogenation catalyst in sulphidic form, at a space velocity of at least 2000 h⁻¹, in the presence of a reducing component, preferably at least partly consisting of hydrogen, in a molar ratio or reducing component to sulphur dioxide of more than 10 up to 100, at a temperature of 125 °C to 300 °C, followed by passing the gas mixture, after the said reduction, through a dry oxidation bed for the oxidation of sulphur compounds, more in particular hydrogen sulphide, to elemental sulphur.

WO 01/23075 A1

**Declaration and Power of Attorney Patent Application
(Design or Utility)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: "Process for the removal of sulphur compounds from gases"

the specification of which

- ☐ is attached hereto
☒ was filed on March 29, 2002 as application serial no. 10/089,578
and or PCT International Application number PCT/NL00/00695 and was amended
on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information know to me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or 35 U.S.C. §365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate of PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		
Number 99203194.8	Country EP	Day/Month/Year Filed 30 September 1999
Number	Country	Day/Month/Year Filed
Number	Country	Day/Month/Year Filed

Express Mail Number

EV 009950277 US

VER-157XX

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)	
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or under 35 U.S.C. §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. or International Application(s)		
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

VER-157XX

Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Attorney

Registration Number

Stanley M. Schurgin	<u>20,979</u>
Charles L. Gagnebin III	<u>25,467</u>
Victor B. Lebovici	<u>30,864</u>
Beverly E. Hjorth	<u>32,033</u>
Holliday C. Heine	<u>34,346</u>
Gordon R. Moriarty	<u>38,973</u>
James F. Thompson	<u>36,699</u>

I hereby authorize them or others whom they may appoint to act and rely on instructions from and communicate directly with the person/organization who/which first sends this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instructed otherwise.

Please direct all correspondence in this case to at the address indicated below:

WEINGARTEN, SCHURGIN, GAGNEBIN & LEBOVICI LLP

Ten Post Office Square
Boston, Massachusetts 02109
United States of America

Full Name of Sole or First Inventor		
Family Name <u>Borsboom</u>	First Given Name <u>Johannes</u>	Second Given Name
Residence and Citizenship		
City of Residence <u>Rijswijk</u>	State or Country of Residence <u>the Netherlands NLX</u>	Country of Citizenship <u>the Netherlands</u>
Post Office Address		
Street Address <u>Frans Halskade 104</u>	City <u>Rijswijk</u>	State & Zip Code or Country <u>2282 VC</u>
Signature of Inventor <u>[Signature]</u>		Date <u>3-7-02</u>

Full Name of Second Inventor, if any		
Family Name <u>van Nisselrooij</u>	First Given Name <u>Petrus</u>	Second Given Name <u>Franciscus Maria Theresia</u>
Residence and Citizenship		
City of Residence <u>Nijmegen</u>	State or Country of Residence <u>the Netherlands NLX</u>	Country of Citizenship <u>the Netherlands</u>
Post Office Address		
Street Address <u>Gerard Noodtstraat 115</u>	City <u>Nijmegen</u>	State & Zip Code or Country <u>6511 SV</u>
Signature of Inventor <u>[Signature]</u>		Date <u>3-7-02</u>